



Ibanez SERVICE MANUAL

CP835 COMPRESSOR II

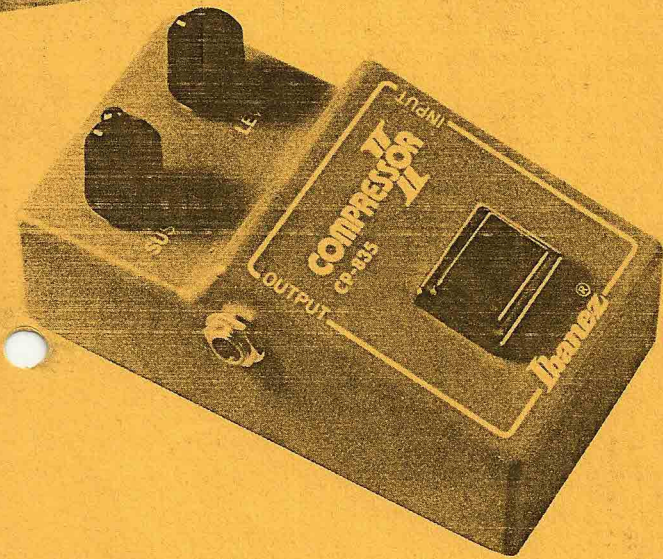

DISPOSITION OF PARTS

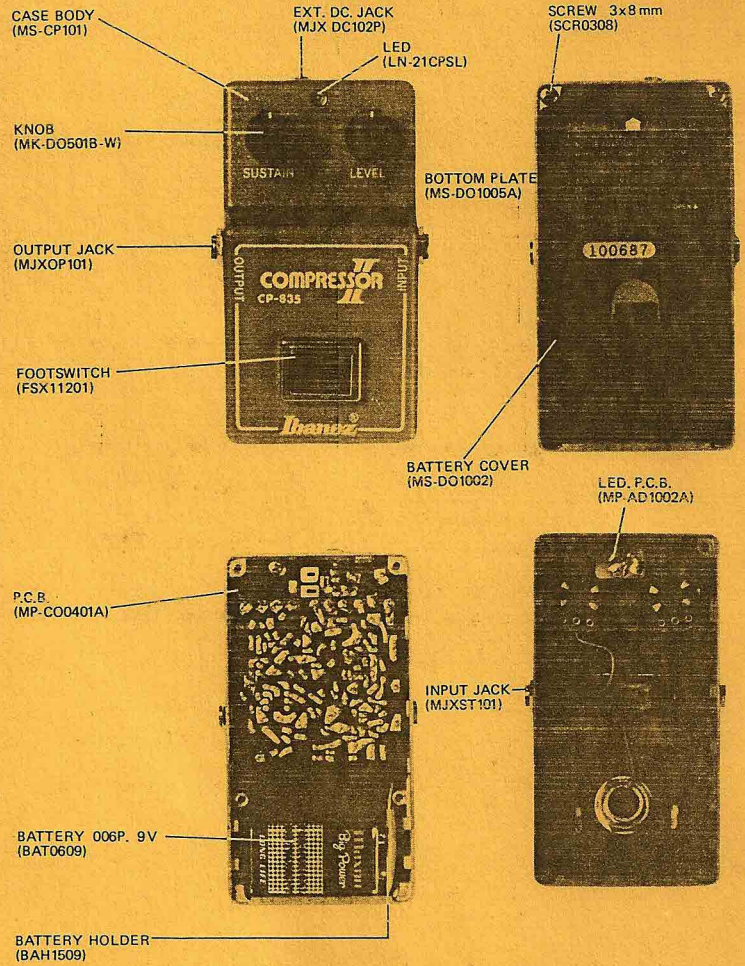

PARTS LIST

| PARTS NAME | TYPE | PARTS NO. | REF. NO. |
|---------------------|-----------------------|-----------------------|----------------------------|
| CASE BODY | | MS CP101 | |
| BOTTOM-PLATE | | MS DO1005A | |
| BOTTOM-RUBBER | | BR DO1003A | |
| BATTERY COVER | | MS DO1002 | |
| BATTERY RUBBER | | BR DO1004A | |
| P.C.B. | | MP PO1101A | |
| FOOT SWITCH | ELECTRIC | FSX11201 | |
| INPUT JACK | MOLD STEREO | MJXST101 | |
| OUTPUT JACK | MOLD OPEN | MJXOP101 | |
| KNOB | | MK-DO0501B-W | |
| BATTERY | 006P 9V | BAT0609 | |
| BATTERY HOLDER | 200mm | BAH1509 | |
| SCREW | 3x8 mm | SCR3080 | |
| LED | LN 21CPSL | LN-21CPSL | |
| LED P.C.B. | | MP-AD1002A | |
| EXT. DC JACK | | MJXDC102P | |
| IC | CA3080 | CA3080 | IC101 |
| Tr. | 2SC1815BL | 2SC1815BL | Q101 - 105, 107, 109 - 111 |
| FET | 2SK44SPC ₂ | 2SK44SPC ₂ | Q106, 108 |
| DIODE | RD5.1EB | RD5.1EB | D106 |
| DIODE | MA150 | MA150 | D101 - 105 |
| VARIABLE RESISTOR | 16 ϕ 100KB | PMXB155R104BSC | |
| VARIABLE RESISTOR | 16 ϕ 500KC | PMXB155R504CSC | |
| SEMI FIXED RESISTOR | 2K3P | RSFST202P3 | VR101 |

P.C.B.

